


■ Features

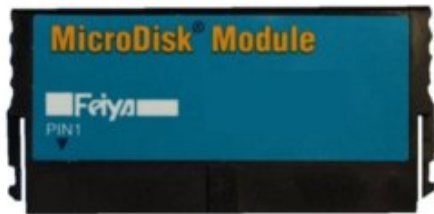

- IDE-compatible Flash Module 44pin vertical 128MB

Quick Link: | [Features](#) | [Download](#) |

Capacity	128MB
Mode	up to PIO Mode 4
System Compatibility	all boards with 44PIN IDE Interface
Operating Systems	DOS, Windows 3.x, WIN95/98/ME/ NT 4.0, WIN2K, Linux, OS/2, Unix, QNX
Endurance	1M Program/Erase cycle
Data Retention	10 years
Data Reliability	Built in ECC 24bits/sector, 1bit correction and 2bit detection
Power Consumption	Mode Read-65mA (max), Write-65mA (max), Idle-7mA
Enviromantal	Operating Temperature 0 C to +70 C
Conditions	Relative Humidity 8% to 95% (with no condensation)
Shock	Operating MIL-STD-202F, Half Sine 50G
Vibration	Operating MIL-STD-202F, 70-200Hz, 15G, 20min/cycle/axis
Acoustic Noise	0dB