

## Model Information



### ■ Main Features

- Universal PCI 3.3 / 5.0V
- 2x RS232
- 1x LPT bidirectional
- UART 16550 (16 Byte FIFO)
- Speed 921 kbps
- PCI Plug and Play
- IRQ Interrupt sharing, only one Interrupt per card
- Drivers for Windows 95 to 7/2008 R2
- Software compatibel with DOS, Windows 3.11, OS/2, Linux and div. Unix

[Contact Online...](#)

# VScom 210L UPCI

Quick Link: | [Main Features](#) | [More Pictures](#) | [Overview](#) | [Hardware Specifications](#) | [Performance Features](#) | [Operating Systems](#) | [Ordering Information](#) |

## ■ More Pictures



Click on the thumbnails for the large picture ...

[>Back to top](#)

## ■ Overview

The L-series is an economic solution for standard applications. The serial ports are based on a 16C550A UART with 16 byte FIFO. The eightfold maximum speed allows some irregular transmission rates.

The bi-directional parallel port is best

## ■ Hardware Specifications

<b>Ports</b>	2x RS232, (RxD, TxD, RTS, CTS, DTR, DSR, DCD, RI) 1x LPT bidirectional
<b>UART</b>	2x 16550 (16 Byte FIFO)
<b>Address</b>	Plug and Play
<b>Interrupts</b>	PCI Plug and Play, only one interrupt/card
<b>Speed</b>	max. 921 kbps
<b>Bus interface</b>	Universal PCI 3.3V / 5.0V
<b>Connectors</b>	1x DB9 male (COM), 1x DB25 female (LPT); 1x DB9 male (COM) (2. Slot)
<b>Size</b>	L120mm x H89mm
<b>Temperature</b>	0°C - 55°C

[>Back to top](#)

## ■ Performance Features

<b>FIFO</b>	FIFO size 16Byte adjustable Rx 1,4,8,14Bytes Tx 1 up to 16Bytes
<b>Handshake</b>	RTS / CTS Xon / Xoff
<b>Speed</b>	1bps up to 921kbps Multiplication factor for legacy applications

<b>UART</b>	UART emulation of 8250 and 16450
-------------	----------------------------------

[>Back to top](#)

## ■ Operating Systems

<b>Windows 2000 up to 7</b>	VScom high performance serial driver, parallel driver x86 and x64 Editions
<b>Server 2000 to 2008 R2</b>	VScom high performance serial driver, parallel driver x86 and x64 Editions
<b>Windows NT 4.0</b>	VScom high performance serial driver, parallel driver control panel applets
<b>Windows 95, 98, SE, ME</b>	VScom high performance serial driver, parallel driver
<b>DOS</b>	virtuell address driver and compatibility tools real DOS Com and LPT port emulation
<b>OS/2</b>	Supported by COM16 driver in recent system releases Third party serial driver SIO.SYS available
<b>Linux</b>	Kernel 2.6 and up: built-in support Previous kernel: VScom high performance real tty and LPT driver
<b>div.UNIX</b>	configuration instructions

[>Back to top](#)

## ■ Ordering Information


<b>Part Number</b>	4463
<b>Product Name</b>	VScom 210L UPCI
<b>Packing list</b>	VScom 210L UPCI card 2nd Bracket with 1 Port RS232 DSUB 9 male CD, English documentation

[>Back to top](#)

- \* Specifications are subject to change without notice.
- \* All trademarks and brands are property of their rightful owners.

## VScom 210L UPCI

[>Back](#)

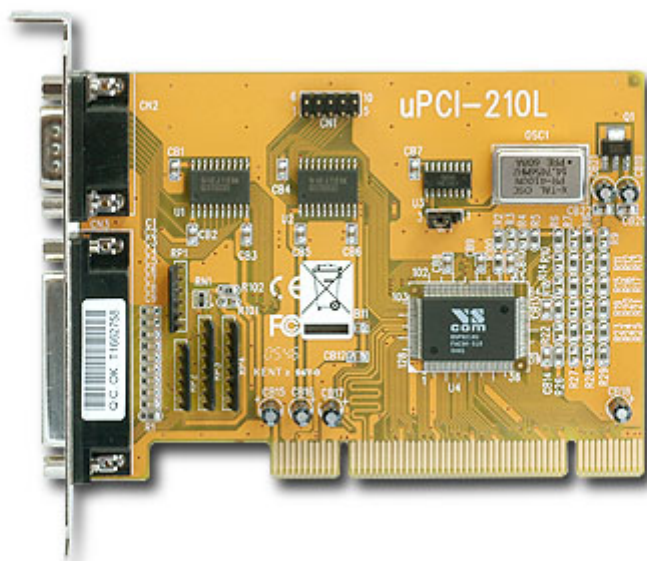

(2017 Jul 27)